

LED NEON · EMUCA NEONLYNX

Neonlynx H LED Neon, 6 × 6 mm, IP65

A slim silicone LED neon strip with an even glow and IP65 protection. 3 m long, natural white, with a lead at each end; it can be cut and reused from both ends without soldering.

3 M WITH LEADS



VOLTAGE

24 V DC

POWER

7.2 W/m

COLOUR

4000 K

SIZE

6 × 6 mm

PROTECTION

IP65

CUT EVERY

33 mm

Specification

Product code	EM-5219820	Supply	24V DC constant voltage
Length	3,024 mm	Power per reel	≈ 21.8 W (7.2 W/m)
LEDs	210 per metre	Leads	1.5 m each end, Miniled
Beam	120°	Cable holes	Ø7 mm (male) · Ø9 mm (female)
Body	Silicone	Mounting	3M tape, clips or in a groove
Dimmable	Yes, with a dimming control	Cutting	Every 33 mm, reusable both ends
Bend radius	Minimum R25 mm	Standards	EN 60598 · LVD · EMC · RoHS

Ideal for

Kitchen plinths

Bathroom niches

Shelf edges


Bar areas

Signage details

Feature lines

Cutting and bending


No soldering needed

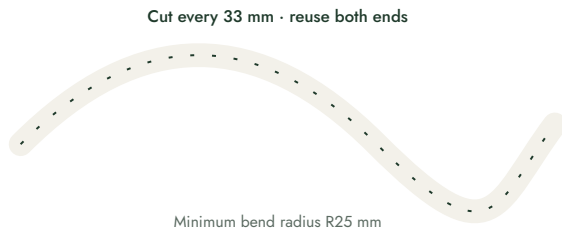

Cut every 33 mm; both pieces stay usable. Keep bends to R25 mm or larger.

Mounting

Tape, clip or groove

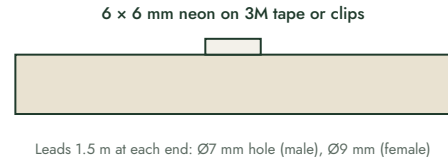

Stick with the 3M tape, add clips on curves, or press into a routed groove for a flush line.

Fitting in six steps

- 01 Plan the line**
Mark the route, keeping bends to R25 mm or more.
- 02 Drill for leads**
Drill Ø7 mm (male end) or Ø9 mm (female end) for the cables.
- 03 Cut if needed**
Cut at a 33 mm mark; both pieces can be reused.
- 04 Fix it**
Use the 3M tape, add clips on curves or fit into a groove.
- 05 Connect**
Plug into a 24V SMART driver with enough spare capacity.
- 06 Test**
Switch on and check the line before final finishing.

Good to know

- IP65: suits bathrooms and splash areas (keep the driver dry).
- Do not twist or kink the strip.
- Use 24V drivers only.
- Fixing clips help hold tight curves.
- Dimmable with Emuca SMART controls.
- Clean with a damp cloth, no solvents.

Size and colour

Stocked as a 3 m reel in natural white (4000K).

3 m · 4000K



SCAN TO ORDER

Technical data from Emuca's published product information and installation instructions for Neonlynx H 6x6 mm 7.2 W/m IP65 24V (52197). Always check fit and wiring before final fixing. LED products must be powered by a suitable 24V DC (or 12V DC) constant-voltage driver. Emuca is a trademark of Emuca S.A.; ABJ Accessories is an independent UK stockist. Questions: info@abjaccessories.co.uk.