

WARDROBE LIFT · GTV PANTOGRAPH RANGE

Pull-Down Wardrobe Rail, *hydraulic lift*

A pull-down (pantograph) wardrobe rail that brings high hanging space down to you. Pull the handle and the oil-damped arms lower the rail smoothly; lift it back and it returns gently. Telescopic to fit three ranges of wardrobe width.

FIXINGS INCLUDED



MAX. LOAD

8 kg

WIDTHS

545–
1200 mm

ARM LENGTH

836 mm

LOWERS

892 mm

COMES FORWARD

710 mm

DAMPING

Oil

Specification

Product code	PG-ST4560 / PG-ST6083 / PG-ST83115
Type	Pull-down rail (pantograph)
Internal width options	545–700 / 645–910 / 875–1200 mm
Maximum load	8 kg
Mechanism	Oil-damped lift with bumper
Arm length	836 mm (pivot to mechanism base)
Mechanism size	260 × 140 mm

Mounting	Inside of the side panels
Pivot position	Half the internal depth from the front
Clearance above rail	Min. 30 mm
Material	Steel
Colours	Anthracite (645–910, 875–1200), white (all)
Fixings included	Yes, with template and hex key
Packaging	Individually packed

Ideal for

Tall wardrobes

Fitted bedrooms

Walk-in wardrobes


Above-rail top boxes

Utility cupboards

Accessible homes

Wardrobe width & height

Front view of the wardrobe section

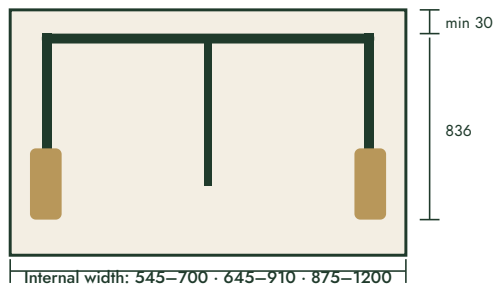


Choose the size by internal width: 545–700, 645–910 or 875–1200 mm.

Leave at least 30 mm above the rail; the arms are 836 mm long.

Depth & lowering movement

Side view – raised and lowered positions

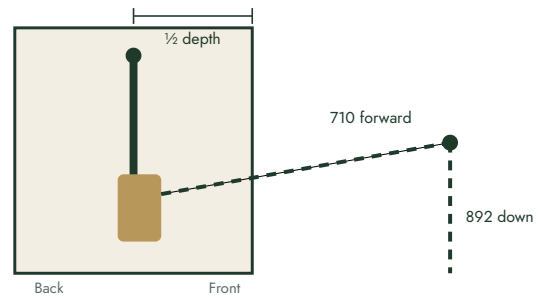

Pivot at half the internal depth.

When lowered the rail comes about 710 mm forward and 892 mm down.

Fitting in six steps

01 Choose the size

Measure the internal width and pick the matching range. Check there is room for the arms to swing out.

03 Fix the arms

Screw the left and right arm mechanisms to the side panels with the screws supplied.

05 Fit the handle

Fit the vertical pull rod and handle to the centre of the rail, and the bumpers.

02 Mark the pivots

Using the template, mark the pivot points on both side panels at half the internal depth, at least 30 mm below the top.

04 Fit the rail

Adjust the telescopic rail to width, then fit it between the arms with the end connectors.

06 Test the lift

Lower and raise the rail a few times with clothes on it. Do not exceed 8 kg.

Good to know

- Check doors, lights and shelves do not foul the arms as the rail comes down.
- Both pivots must be at exactly the same height and depth.
- Fix into sound, solid side panels using every screw supplied.
- Spread garments along the rail; the 8 kg limit includes hangers.
- Guide the rail up and down with the handle – do not let it drop.
- Wipe with a soft, damp cloth. No abrasive pads or solvents.

Three widths, two colours

Select the width and colour on the product page. Anthracite comes in 645–910 and 875–1200 mm; white in all three.

545–700 mm

645–910 mm

875–1200 mm



SCAN TO ORDER

Technical data from the manufacturer's published product card and fitting instructions for the GTV PG-ST pull-down rail range. Dimensions in millimetres. Always check your cabinet before fixing. GTV is a trademark of GTV Poland S.A.; ABJ Accessories is an independent UK stockist. Questions about fitting or bulk orders: info@abjaccessories.co.uk.