

LIFT-UP STAY · GTV MINILIFT NEW

MiniLift Lift-Up Flap Stay, *black*

A slim lift-up stay that holds a top-hinged door open on wall units and small top boxes. Choose the strength by the weight of your door; use two on wider or heavier fronts.

SINGLE OR PAIR



LIGHT

2–3 kg front

MEDIUM

3.5–4 kg front

STRONG

5–6 kg front

OPENING

~100°

FRONT HEIGHT

≤550 mm

WIDTH

≤1200 mm

Specification

Product code	PD-MINILIFTNEW-LIGHT/MEDIUM/STRONG-20
Front weight	2–3 / 3.5–4 / 5–6 kg
Opening angle	Approx. 100°
Front height	Up to 550 mm
Cabinet width	Up to 1200 mm
Min. inside depth	130 mm
Min. inside height	220 mm (overlay hinges)

Hinges	Required – 2 at the top of the door
Body fixing	184 mm below top, 37 mm from front
Front fixing	91 mm from top, 32 mm holes
Decelerator	None
Material	Steel
Colour	Black
Screws included	Yes

Ideal for

Kitchen wall units

Top boxes

Bathroom cabinets


Media units

Utility cupboards

Display cabinets

Cabinet & fixing points

Side view, overlay hinges

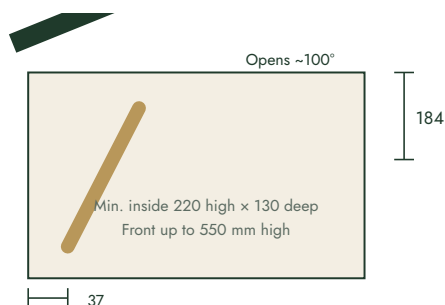

Body bracket 184 mm down, 37 mm back from the front edge.
Front bracket 91 mm from the top of the door, holes 32 mm apart.

Choose the strength

By the weight of the door

Light	Medium	Strong
2–3 kg	3.5–4 kg	5–6 kg

Weigh the door with its handle

Weigh the door with the handle fitted, then pick the strength. Use two stays on wide doors.

Fitting in six steps

01 Hang the door

Fit two hinges at the top edge of the door first.

03 Fix the stay

Screw the stay body to the cabinet side on your marks.

05 Fix the front bracket

Screw the front bracket on (holes 32 mm apart) and connect it to the stay.

02 Mark the body bracket

On the cabinet side, mark 184 mm down from the top and 37 mm back from the front edge.

04 Mark the front

On the door, mark 91 mm down from the top edge, 15.5 mm in from the side.

06 Test

Open and close the door – it should stay up and close gently.

Good to know

- Check the weight: too weak and the door drops; too strong and it flies up.
- Fit to sound board – the stay takes the full door weight.
- Keep fingers clear of the arm while fitting.
- For inset or half-overlay hinges, check the GTV fitting positions.
- Wipe with a dry cloth.
- Do not hang from an open door.

Three strengths

Light, Medium or Strong – single or pair.

Light

Medium

Strong



SCAN TO ORDER

Technical data from the manufacturer's published product card and technical sheet for GTV MiniLift NEW (PD-MINILIFTNEW). Dimensions in millimetres. Always test-fit before final fixing. GTV is a trademark of GTV Poland S.A.; ABJ Accessories is an independent UK stockist. Questions about fitting or bulk orders: info@abjaccessories.co.uk.